



---

## CABINET DOORS

Modern Design Made Easy.

---





Doors  
finished with  
REHAU  
LaserEdge™

REHAU offers the largest selection cabinet doors for modern living environments. By offering fully fabricated doors, we are making it easier for cabinet makers, regardless of their volume, to take advantage of the growing demand for modern components.

**Choose from high-gloss, glass matte, natural and metal surfaces, and we'll deliver...**

We deliver modern design to your door in days. With zero-joint perfection and 60+ finishes from which to choose, REHAU takes the stress out of modern and lets you do what you do best: satisfy your customers.

**Customer Service Contacts**


Hours | Monday-Friday, 8am to 7pm EST

Email | [orders@rehau.com](mailto:orders@rehau.com)

[www.na.rehau.com/cabinetdoors](http://www.na.rehau.com/cabinetdoors)

United States Phone (888) 734-2810 Fax (616)-285-7622

Canada Phone (888) 905-0345 Fax (514) 905-0490

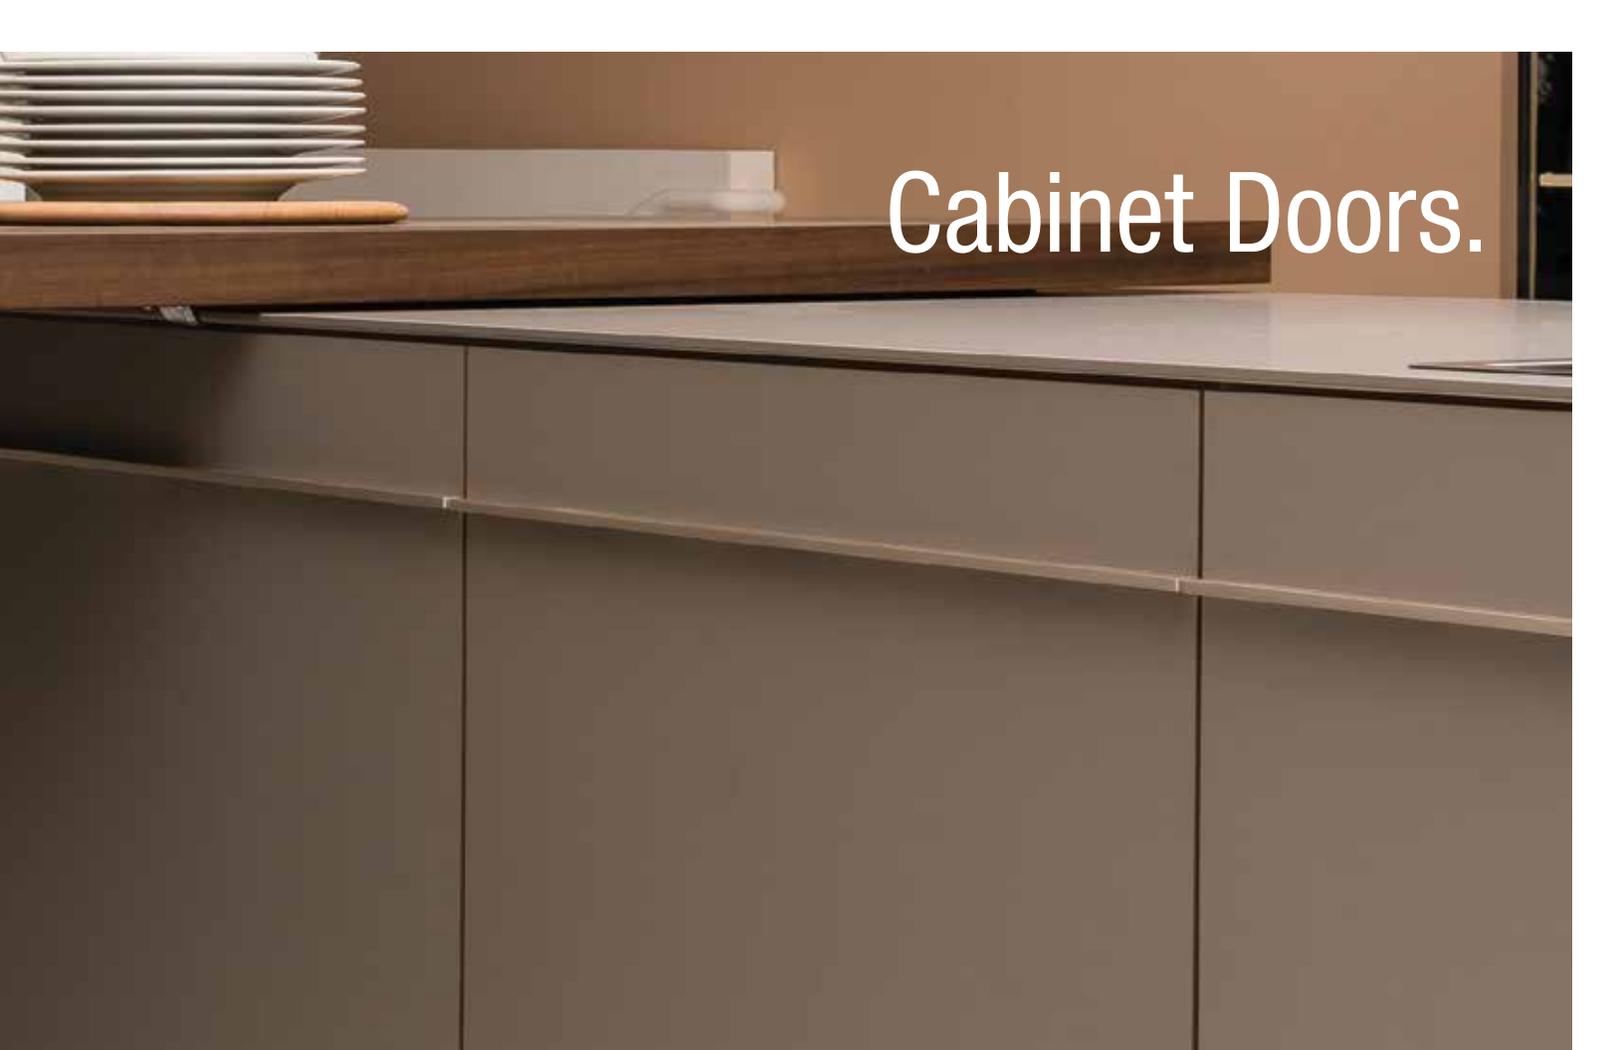

# Cabinet Doors.

## CONTENTS

<b>High-gloss Surfaces</b>	<b>4</b>	<b>Natural Surfaces</b>	<b>34</b>
RAUVISIO brilliant™ Mirror high-gloss acrylic surface	6	RAUVISIO terra™ Textured woodgrain HPL surface	36
RAUVISIO radiant™ High-gloss PET surface	10	RAUVISIO leather™ Genuine, reconstituted leather surface	40
<b>Glass Surfaces</b>	<b>14</b>	<b>Metal Surfaces</b>	<b>44</b>
RAUVISIO crystal™ Polymer back-painted glass surface	16	RAUVISIO metal™ Cool, authentic metal surface	46
RAUVISIO crystal™ matte Polymer back-painted frosted glass surface	20	Tambour Doors Metallic line roller shutter system	50
<b>Matte Surfaces</b>	<b>24</b>	<b>Ordering</b>	<b>54</b>
FENIX NTM® Nanotech matte material	26		
RAUVISIO sky™ and urban™ Super matte and matte/gloss fusion PET surface	30		



High-gloss.  
Surfaces with depth.






## RAUVISIO BRILLIANT

### Mirror High-gloss Acrylic Surface


RAUVISIO brilliant™ offers the highest quality in high-gloss components. Our components feature double-sided high-gloss with matching mirror-gloss edgeband. The high-gloss acrylic surfaces are laminated onto super refined MDF using PUR glue in a clean room environment to ensure a mirror-like reflective quality.



20+ years of UV resistance



Mirror-like reflective quality



Double-sided high-gloss



Intense color depth



Zero-joint technology




Surfaces and edgeband perfectly matched



Heat and humidity resistant




Warp resistant



*Bianco*

5000B




*Meringa*

5026B



*Notte*

1680L



*Moro*

5112B




*Magnolia*

5335B



*Prugna*

5642B



*Gabbiano*

6339B



*Bigio*

6340B



*Vino*

5641B



*Marrone*

1679L



*Cubanite*

5338B




*Rame*


1678L



### Slab profile

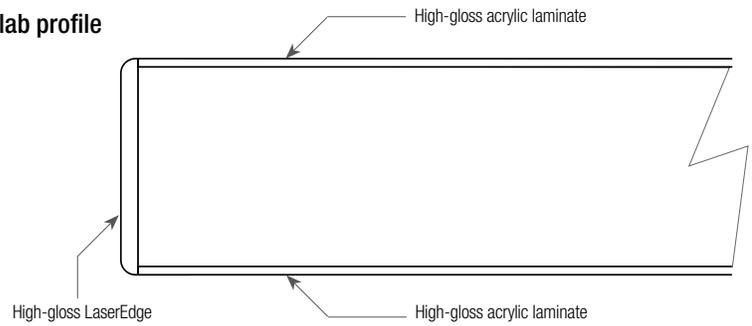

### Shaker profile

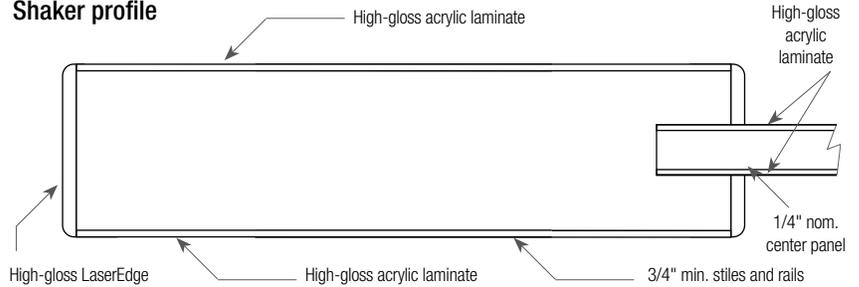

#### Profile Specifications

Appearance	High-gloss
Door style	Slab and shaker
Design style	Modern, contemporary
Construction	PUR laminated face and back, REHAU LaserEdge
Shaker stiles and rails	2-1/2 in., 2-3/4 in. and 3 in.
Face material	High-gloss acrylic - multiple colors
Back material	High-gloss acrylic - matching color
Edgeband	REHAU LaserEdge - matching color
Core	Super-refined MDF
Board thickness	3/4 in (19.5 mm)

#### Size Parameters

Minimum	3 x 5 in (76.2 x 127 mm)
Maximum	50 x 109 in (1270 x 2768.6 mm)
Minimum shaker size	6 x 12 in (152.4 x 304.8 mm) using 2.5 in. rails

#### Edgebanding Profile

Top edge	1.5 mm radius
Bottom edge	1.5 mm radius
Edgeband finish - standard	Mirror gloss - color matched
Edgeband finish - optional	V-Edge two-toned metallic - color matched (select colors)

#### Refacing Options

PSA sheet	51 x 110 x .031 in (1300 x 2800 x 0.9 mm) acrylic sheet with pre-applied adhesive
-----------	---



### **Board Specifications**

RAUVISIO brilliant is flat laminated to a high-quality super-refined engineered MDF core. An engineered core provides a stable, consistent substrate which virtually eliminates warping.

### **Edgeband Specifications**

All components are edgebanded with REHAU LaserEdge, which provides a seamless joint that is extremely heat and moisture resistant. The result is a seamless board that rivals solid surfaces and exceeds high-end lacquered finishes.

### **Cleaning and Care**

Clean with a damp microfiber cloth and with a mild soap if needed. Do not dry-wipe the acrylic finish. Avoid abrasive cleaners, solvent based cleaners and harsh chemicals. Do not use paper towels, brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

### **Protective Coat**

A protective peel coat is applied to the top of the high-gloss surfaces, as well as to the edgebanded sides. Do not expose peel coat to direct sunlight before removal. Remove promptly after installing cabinet but prior to mounting decorative hardware. To remove peel coat, use rubber fingertips or our peel coat removal tool.



## RAUVISIO RADIANT

### High-gloss PET Surface

RAUVISIO radiant™ offers excellent value and consistent quality in high-gloss components. Our components feature single-sided high-gloss with matching mirror-gloss edgeband. The high-gloss surface is created by using the highest quality PET film (highest temperature and UV resistance of any PET film) applied over a melamine board.



Batch-to-batch color consistency



Matching high-gloss and matte colors



Excellent UV resistance



Highest quality PET film



Zero-joint technology




Surfaces and edgeband perfectly matched



Heat and humidity resistant




Warp resistant




White

154208



Pearl White

154210



Grey

154213



Storm Grey

154211



Black

154209



Zebrawood

154219




Ebony

154220



Grey Pine

154222

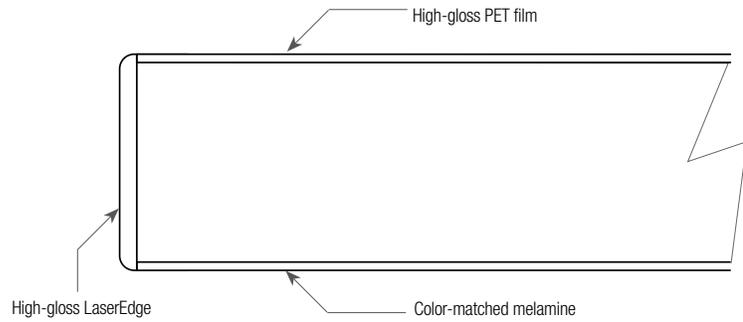

### Profile Specifications

Appearance	High-gloss
Door style	Slab
Design style	Modern, contemporary
Construction banded	PET film applied over melamine board, REHAU LaserEdge
Face material	PET film - multiple colors
Back material	Melamine - matching color
Edgeband	REHAU LaserEdge - matching color
Core	Melamine board
Grain direction (woodgrains only)	Choose vertical or horizontal (not cabinet matched)
Board thickness	3/4 in (18.5 mm)

### Size Parameters

Minimum	3 x 5 in (76.2 x 127 mm)
Maximum	47 x 109 in (1193.8 x 2768.6 mm)

### Edgebanding Profile

Top edge	1.5 mm radius
Bottom edge	1.5 mm radius
Edgeband finish	Mirror gloss - color matched



### **Board Specifications**

RAUVISIO radiant uses a PET film applied (via proprietary manufacturing process) to a melamine board. A melamine board is an engineered core that provides a stable, consistent substrate, virtually eliminating warping.

### **Edgeband Specifications**

All components are edgebanded with REHAU LaserEdge, which provides a seamless joint that is extremely heat and moisture resistant. The result is a seamless board that rivals solid surfaces and high end lacquered finishes.

### **Cleaning and Care**


Clean with a damp microfiber cloth and with a mild soap if needed. While the high-gloss surface is scratch resistant, it should never be dry-wiped. Avoid abrasive cleaners, solvent based cleaners and harsh chemicals. Do not use paper towels, brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

### **Protective Coat**

A protective peel coat is applied to the top of the high-gloss surface, as well as to the edgebanded sides. Do not expose peel coat to direct sunlight before removal. Remove promptly after installing cabinet but prior to mounting decorative hardware. To remove peel coat, use rubber fingertips or our peel coat removal tool.



Glass.  
A glass kitchen  
for real life.

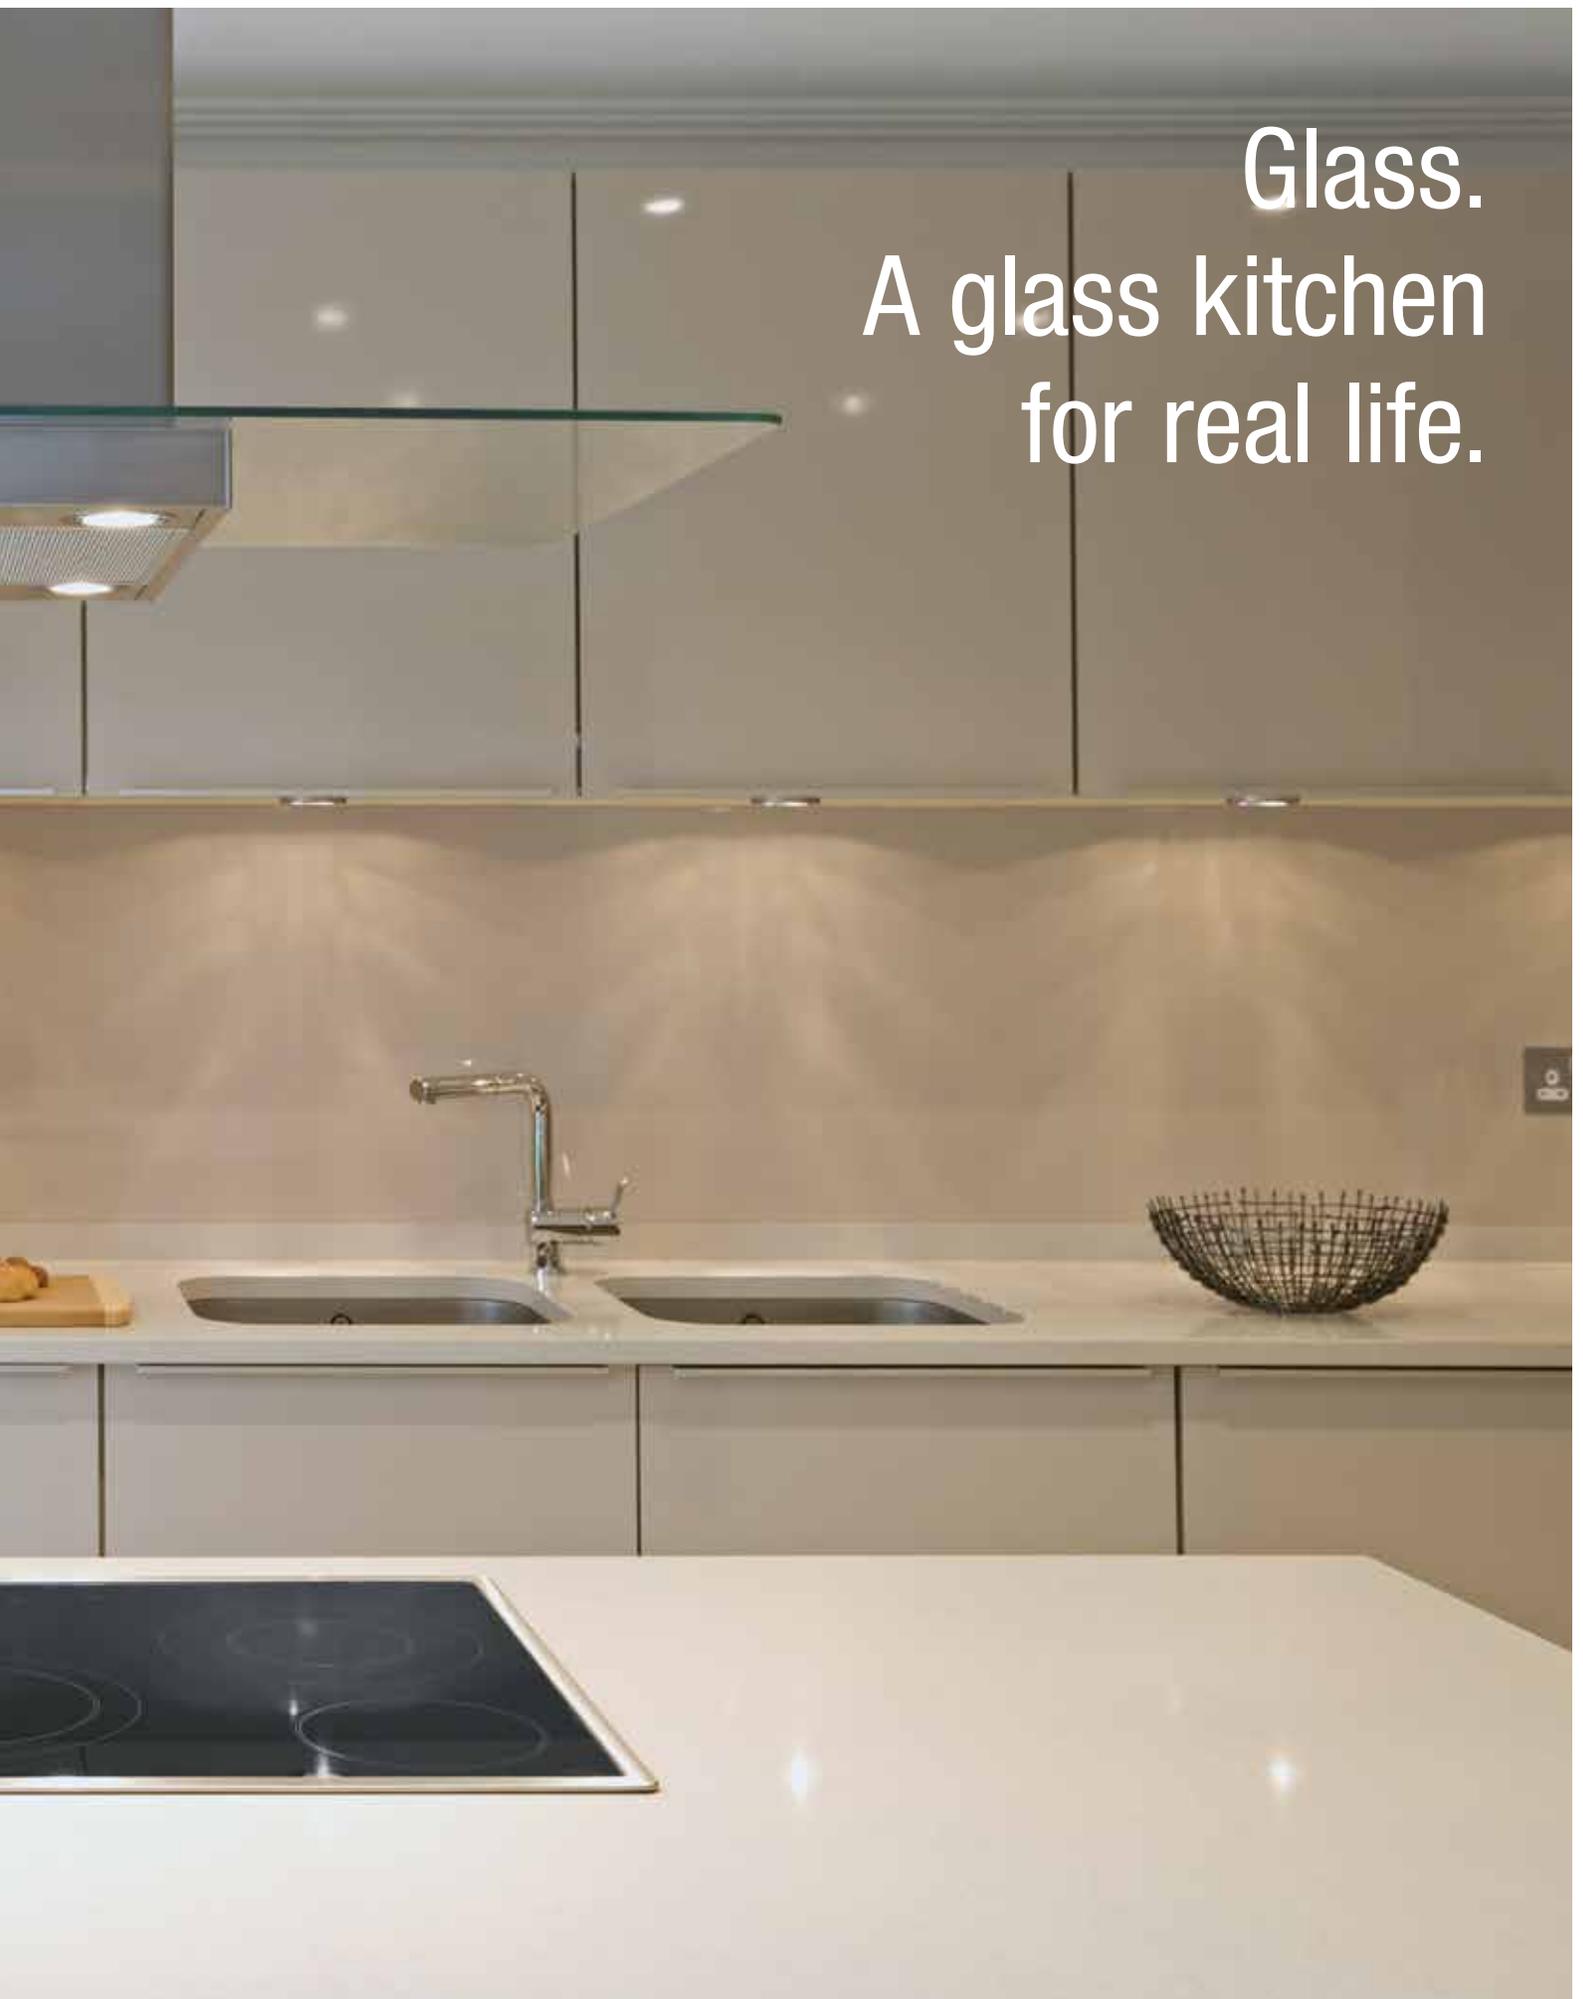



## RAUVISIO CRYSTAL

### Polymer Back-painted Glass

RAUVISIO crystal™ gives all of the beauty of back-painted glass with none of the drawbacks. It can be cut and drilled with normal woodworking tools, and doesn't require an aluminum frame. Our components feature matching duo-design laser edgeband. The RAUVISIO crystal glass acrylic surfaces are laminated onto super-refined MDF using specially formulated PUR glue in a clean room environment to ensure optical grade reflective quality and perfectly balanced panels.



10x more break resistant



Scratch resistant



Normal woodworking tool processing



No aluminum frame



Intense color depth



Zero-joint technology



Surfaces and edgeband perfectly matched




Heat and humidity resistant




Warp resistant




Marker board with no ghosting



*Bianco High-gloss V2778*



*Perla High-gloss V2892*




*Magnolia High-gloss 73703*




*Corniola High-gloss 1683L*



*Fumo High-gloss 1686L*





*Sabbia High-gloss 1687L*



*Menta High-gloss 1684L*



*Azzurro High-gloss 1685L*

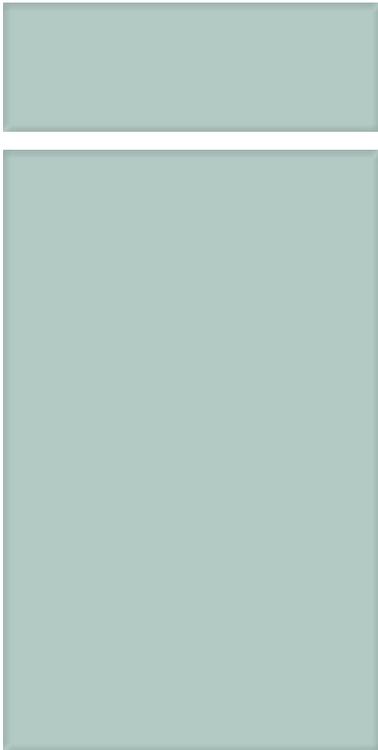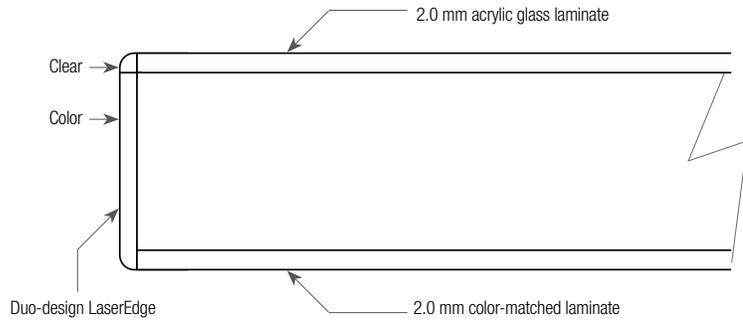

### Profile Specifications


Appearance	Back-painted glass
Door style	Slab
Design style	Modern, contemporary
Construction	PUR laminated face and back, REHAU LaserEdge
Face material	Two-layer high-gloss acrylic - multiple colors
Back material	Balancing sheet - matching color
Edgeband	REHAU LaserEdge - matching color
Core	Super refined MDF
Board thickness	3/4 in (19 mm)

### Size Parameters

Minimum	3 x 5 in (76.2 x 127 mm)
Maximum	50 x 109 in (1270 x 2768.6 mm)

### Edgebanding Profile

Top edge	1.5 mm radius
Bottom edge	1.5 mm radius
Edgeband finish - standard	Duo design - color matched
Edgeband finish - optional	Mirror-gloss - color matched (select colors)

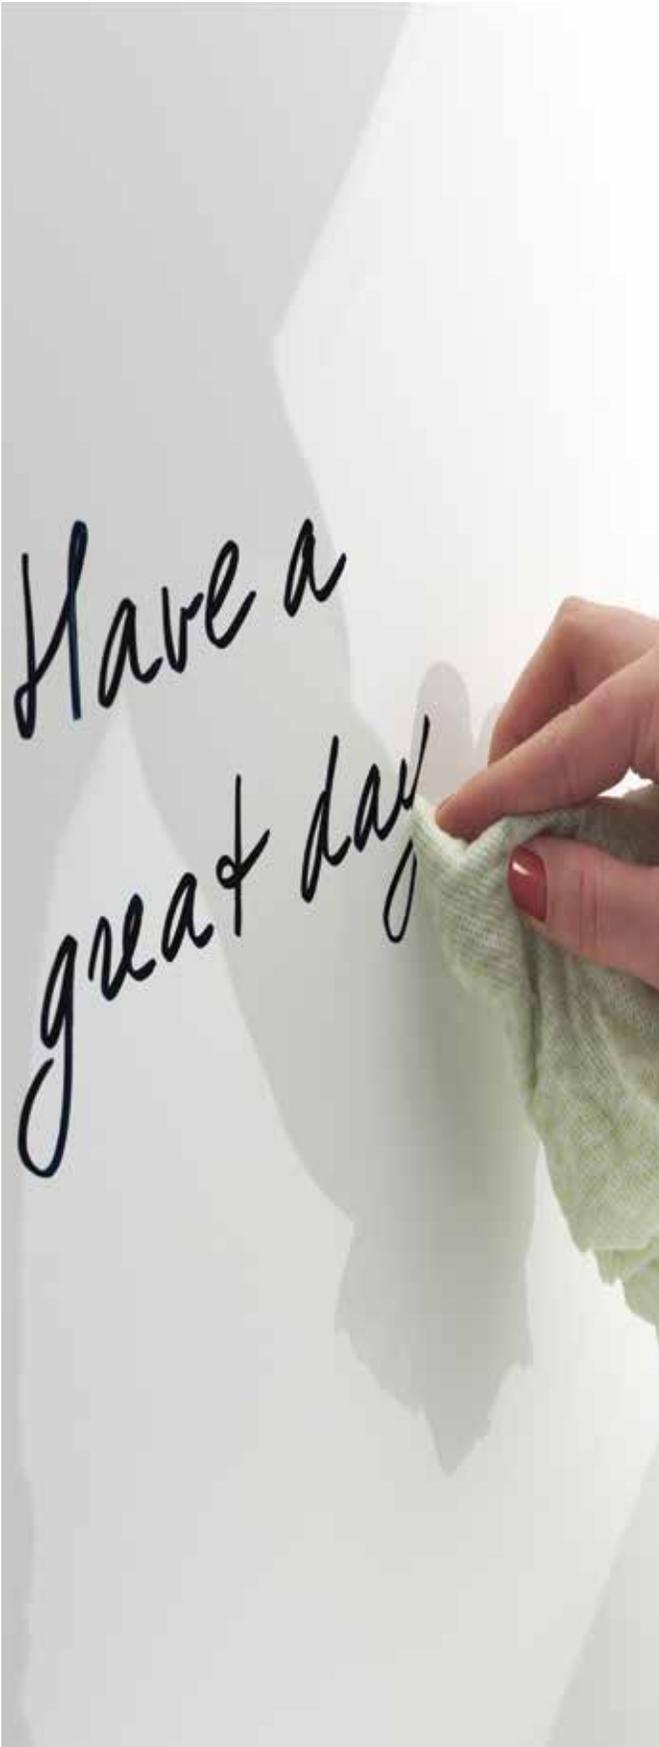

### **Board Specifications**

RAUVISIO crystal is flat laminated to a high-quality super-refined engineered MDF core. An engineered core provides a stable, consistent substrate which virtually eliminates warping.

### **Edgeband Specifications**

All components are edgebanded with duo-design REHAU LaserEdge, which provides a seamless joint that is extremely heat and moisture resistant. The result is a seamless board that looks like real glass. The duo-design laser REHAU LaserEdge has a 2.0 mm clear layer at the top to match the 2.0 mm crystal glass laminate sheet, with an invisible functional layer that allows the glass effect to continue all the way to the edge.

### **Cleaning and Care**

Clean with a damp microfiber cloth and with a mild soap if needed. RAUVISIO crystal has a very hard, scratch-resistant finish. However, solvent-based cleaners and harsh chemicals should be avoided. Avoid abrasive cleaners, solvent based cleaners and harsh chemicals. Do not use paper towels, brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

### **Protective Coat**

A protective peel coat is applied to the top of the high-gloss polymer glass surface, as well as to the edgebanded sides. Do not expose peel coat to direct sunlight before removal. Remove promptly after installing cabinet but prior to mounting decorative hardware. To remove peel coat, use rubber fingertips or our peel coat removal tool.

---

### **Design Awards**



**interzum award:  
intelligent  
material & design  
2013**



**reddot design award  
honourable mention 2013**




## RAUVISIO CRYSTAL MATTE

### Polymer Back-painted Frosted Glass

RAUVISIO crystal™ matte gives all of the beauty of back-painted frosted glass with none of the drawbacks. It can be cut and drilled with normal woodworking tools and doesn't require an aluminum frame. Our components feature matching duo-design REHAU LaserEdge laser edgeband. The RAUVISIO crystal glass acrylic surfaces are laminated onto super-refined MDF using specially formulated PUR glue in a clean room environment to ensure the highest quality and perfectly balanced panels.




10x more break resistant



Scratch resistant



Normal woodworking tool processing



No aluminum frame



Intense color depth



Zero-joint technology



Surfaces and edgeband perfectly matched



Heat and humidity resistant




Warp resistant



*Bianco*

*Matte 1696L*



*Perla*

*Matte 1697L*



*Magnolia*

*Matte 1698L*



*Corniola*

*Matte 1699*



*Fumo*

*Matte 1702L*



*Sabbia*

*Matte 1703L*



*Menta*



*Matte 1700L*




*Azzurro*

*Matte 1701L*

### Bevel edge

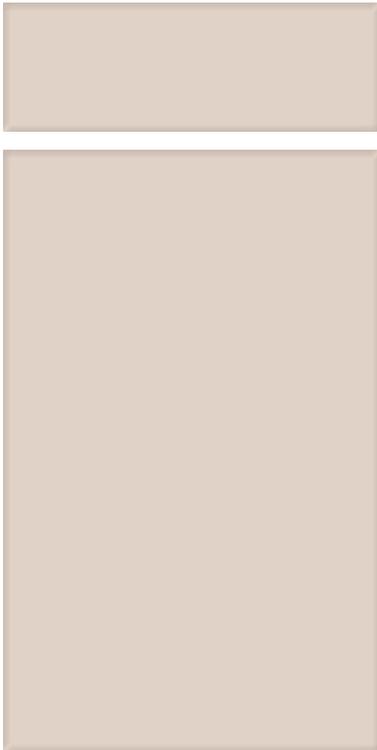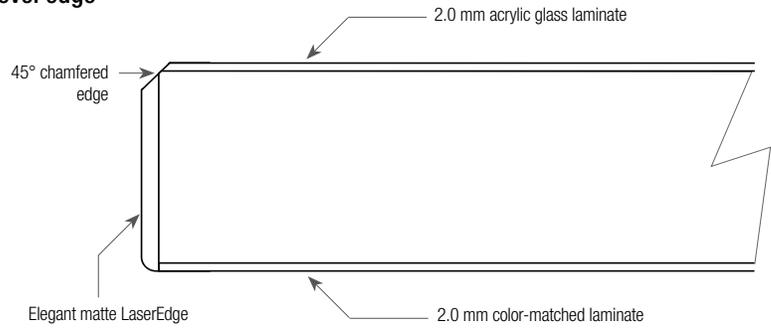

### Radius edge

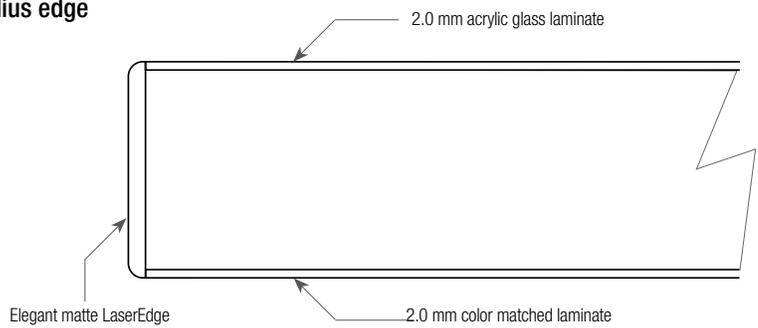

#### Profile Specifications

Appearance	Frosted back-painted glass
Door style	Slab
Design style	Modern, contemporary
Construction	PUR laminated face and back, REHAU LaserEdge
Face material	Matte acrylic - multiple colors
Back material	Matte acrylic - matching color
Edgeband	REHAU LaserEdge - matching color
Core	Super refined MDF
Board thickness	3/4 in (19 mm)

#### Size Parameters

Minimum	3 x 5 in (76.2 x 127 mm)
Maximum	50 x 109 in (1270 x 2768.6 mm)

#### Edgebanding Profile

Top edge	1.5 mm radius or 45° 3 x 3 mm chamfer
Bottom edge	1.5 mm radius
Edgeband finish - standard	Elegant matte - color matched



### **Board Specifications**

RAUVISIO crystal is flat laminated to a high-quality super-refined engineered MDF core. An engineered core provides a stable, consistent substrate, virtually eliminating warping.

### **Edgeband Specifications**

All components are edgebanded with our matching elegant matte REHAU LaserEdge, which provides a seamless joint that is extremely heat and moisture resistant. The result is a seamless board that mimics frosted glass. The elegant matte REHAU LaserEdge is trimmed at 45°, giving a glossy chamfered edge just like real frosted glass when cut, or you can choose a traditional radius edge. The bottom edge is a typical radius to give a proper appearance against the cabinet.

### **Cleaning and Care**

Clean with a damp microfiber cloth and with a mild soap if needed. RAUVISIO crystal has a very hard, scratch-resistant finish. However, solvent-based cleaners and harsh chemicals should be avoided. Avoid abrasive cleaners, solvent based cleaners and harsh chemicals. Do not use paper towels, brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

### **Protective Coat**

A protective peel coat is applied to the top of the frosted glass matte surface, as well as to the edgebanded sides. Do not expose peel coat to direct sunlight before removal. Remove promptly after installing cabinet but prior to mounting decorative hardware. To remove peel coat, use rubber fingertips or our peel coat removal tool.





Matte.  
Super soft look  
and feel.



## FENIX NTM

### Nanotech Matte Material

FENIX NTM® is a next generation laminate surface that uses nanotechnology to achieve a super matte finish, that doesn't show fingerprints, and is very durable and heat resistant. Our components feature matching REHAU LaserEdge edgeband. The FENIX NTM surfaces are laminated onto MDF or particleboard with the top surface being FENIX NTM laminate and the backer sheet, a perfectly balanced color-matched HPL sheet.



Thermal healing




Low reflectivity



Anti-fingerprint



Soft touch



Enhanced anti-bacterial properties



Scratch resistant



Zero-joint technology



Surfaces and edgeband perfectly matched



Heat and humidity resistant



Warp resistant



Chemical resistant



Suitable for contact with food



*Bianco Male*

0029




*Bianco Alaska*

0030



*Bianco Kos*

0032



*Grigio Londra*

0718



*Blu Delft*

0721



*Nero Ingo*

0720



*Grigio Bromo*

0724



*Grigio Efeso*

0725



*Zinco Doha*

2628



*Bronzo Doha*

2629




*Piombo Doha*

2630



*Titanio Doha*

2638

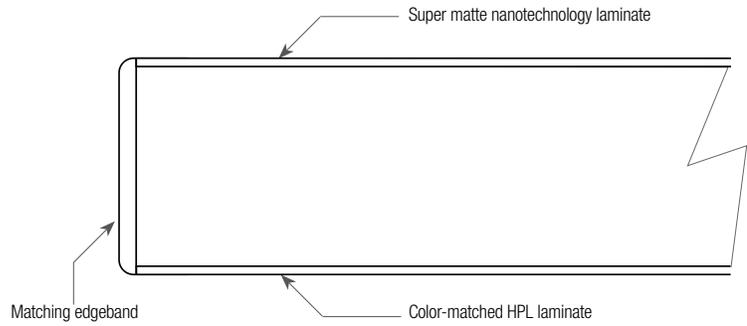

### Profile Specifications

Appearance	Super matte
Door style	Slab
Design style	Modern, contemporary
Construction	PUR laminated face and back, REHAU LaserEdge
Face material	Super matte nanotech laminate - multiple colors
Back material	HPL - matching color
Edgeband	REHAU LaserEdge - matching color
Core	Super-refined MDF or particleboard
Board thickness	13/16 in (21 mm)

### Size Parameters

Minimum	3 x 5 in (76.2 x 127 mm)
Maximum	50 x 119 in (1270 x 3022.6 mm)

### Edgebanding Profile

Top edge	1.5 mm radius
Bottom edge	1.5 mm radius
Edgeband finish	Elegant matte- color matched



### **Board Specifications**

FENIX NTM is flat laminated to a high-quality engineered MDF or particleboard core. An engineered core provides a stable, consistent substrate, virtually eliminating warping.

### **Edgeband Specifications**

All components are edgebanded with REHAU LaserEdge, which provides a seamless joint that is extremely heat and moisture resistant. The result is a seamless board that looks like a matte solid surface.

### **Cleaning and Care**

Clean with a damp microfiber cloth and with a mild soap if needed. While FENIX NTM is resistant to most chemicals, solvent-based cleaners and harsh chemicals should be avoided. Do not use brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

### **Protective Coat**

A protective peel coat is applied to the top and bottom surfaces, as well as to the edgebanded sides. Do not expose peel coat to direct sunlight before removal. Remove promptly after installing cabinet but prior to mounting decorative hardware. To remove peel coat, use rubber fingertips or our peel coat removal tool.



## RAUVISIO SKY AND URBAN Super Matte PET Surface


RAUVISIO sky™ and RAUVISIO urban™ offer excellent value and consistent quality in super matte components. Our components feature single sided super matte with matching matte edgeband. The super matte surface is created by using the highest quality PET film (highest temperature and UV resistance of any PET film) applied over a melamine board.



Low reflectivity



Batch-to-batch  
color consistency



Matching  
high-gloss and  
matte colors



Excellent UV  
resistance



Highest quality  
PET film



Zero-joint  
technology



Surfaces and  
edgeband  
perfectly matched



Heat and humidity  
resistant



Warp resistant




---

**RAUVISIO sky**



White

154208



Grey

154213



Storm Grey

154211



Black

154209

---

**RAUVISIO urban**




White

154223



Black

154224

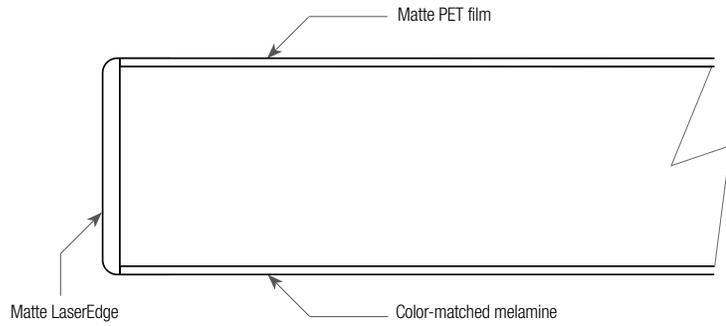

### Profile Specifications

Appearance	Super matte or decorative
Door style	Slab
Design style	Modern, Modern, contemporary
Construction	PET film applied over melamine, REHAU LaserEdge
Face material	PET film - multiple colors
Back material	Melamine - matching color
Edgeband	REHAU LaserEdge - matching color
Core	Melamine board
Board thickness	3/4 in (18.5 mm)

### Size Parameters

Minimum	3 x 5 in (76.2 x 127 mm)
Maximum	47 x 109 in (1193.8 x 2768.6 mm)

### Edgebanding Profile

Top edge	1.5 mm radius
Bottom edge	1.5 mm radius
Edgeband finish	Elegant matte - color matched



### **Board Specifications**

RAUVISIO sky and RAUVISIO urban uses a PET film applied (via proprietary manufacturing process) to a melamine board. A melamine board is an engineered core that provides a stable, consistent substrate, virtually eliminating warping.

### **Edgeband Specifications**

All components are edgebanded with REHAU LaserEdge, which provides a seamless joint that is extremely heat and moisture resistant. The result is a seamless board that looks like a matte solid surface.

### **Cleaning and Care**


Clean with a damp microfiber cloth and with a mild soap if needed. While the matte surface is scratch resistant, it should never be dry-wiped. Avoid abrasive cleaners, solvent based cleaners and harsh chemicals. Do not use paper towels, brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

### **Protective Coat**

A protective peel coat is applied to the top of the super matte surface, as well as to the edgebanded sides. Do not expose peel coat to direct sunlight before removal. Remove promptly after installing cabinet but prior to mounting decorative hardware. To remove peel coat, use rubber fingertips or our peel coat removal tool.



Natural.  
Bring the outside in.

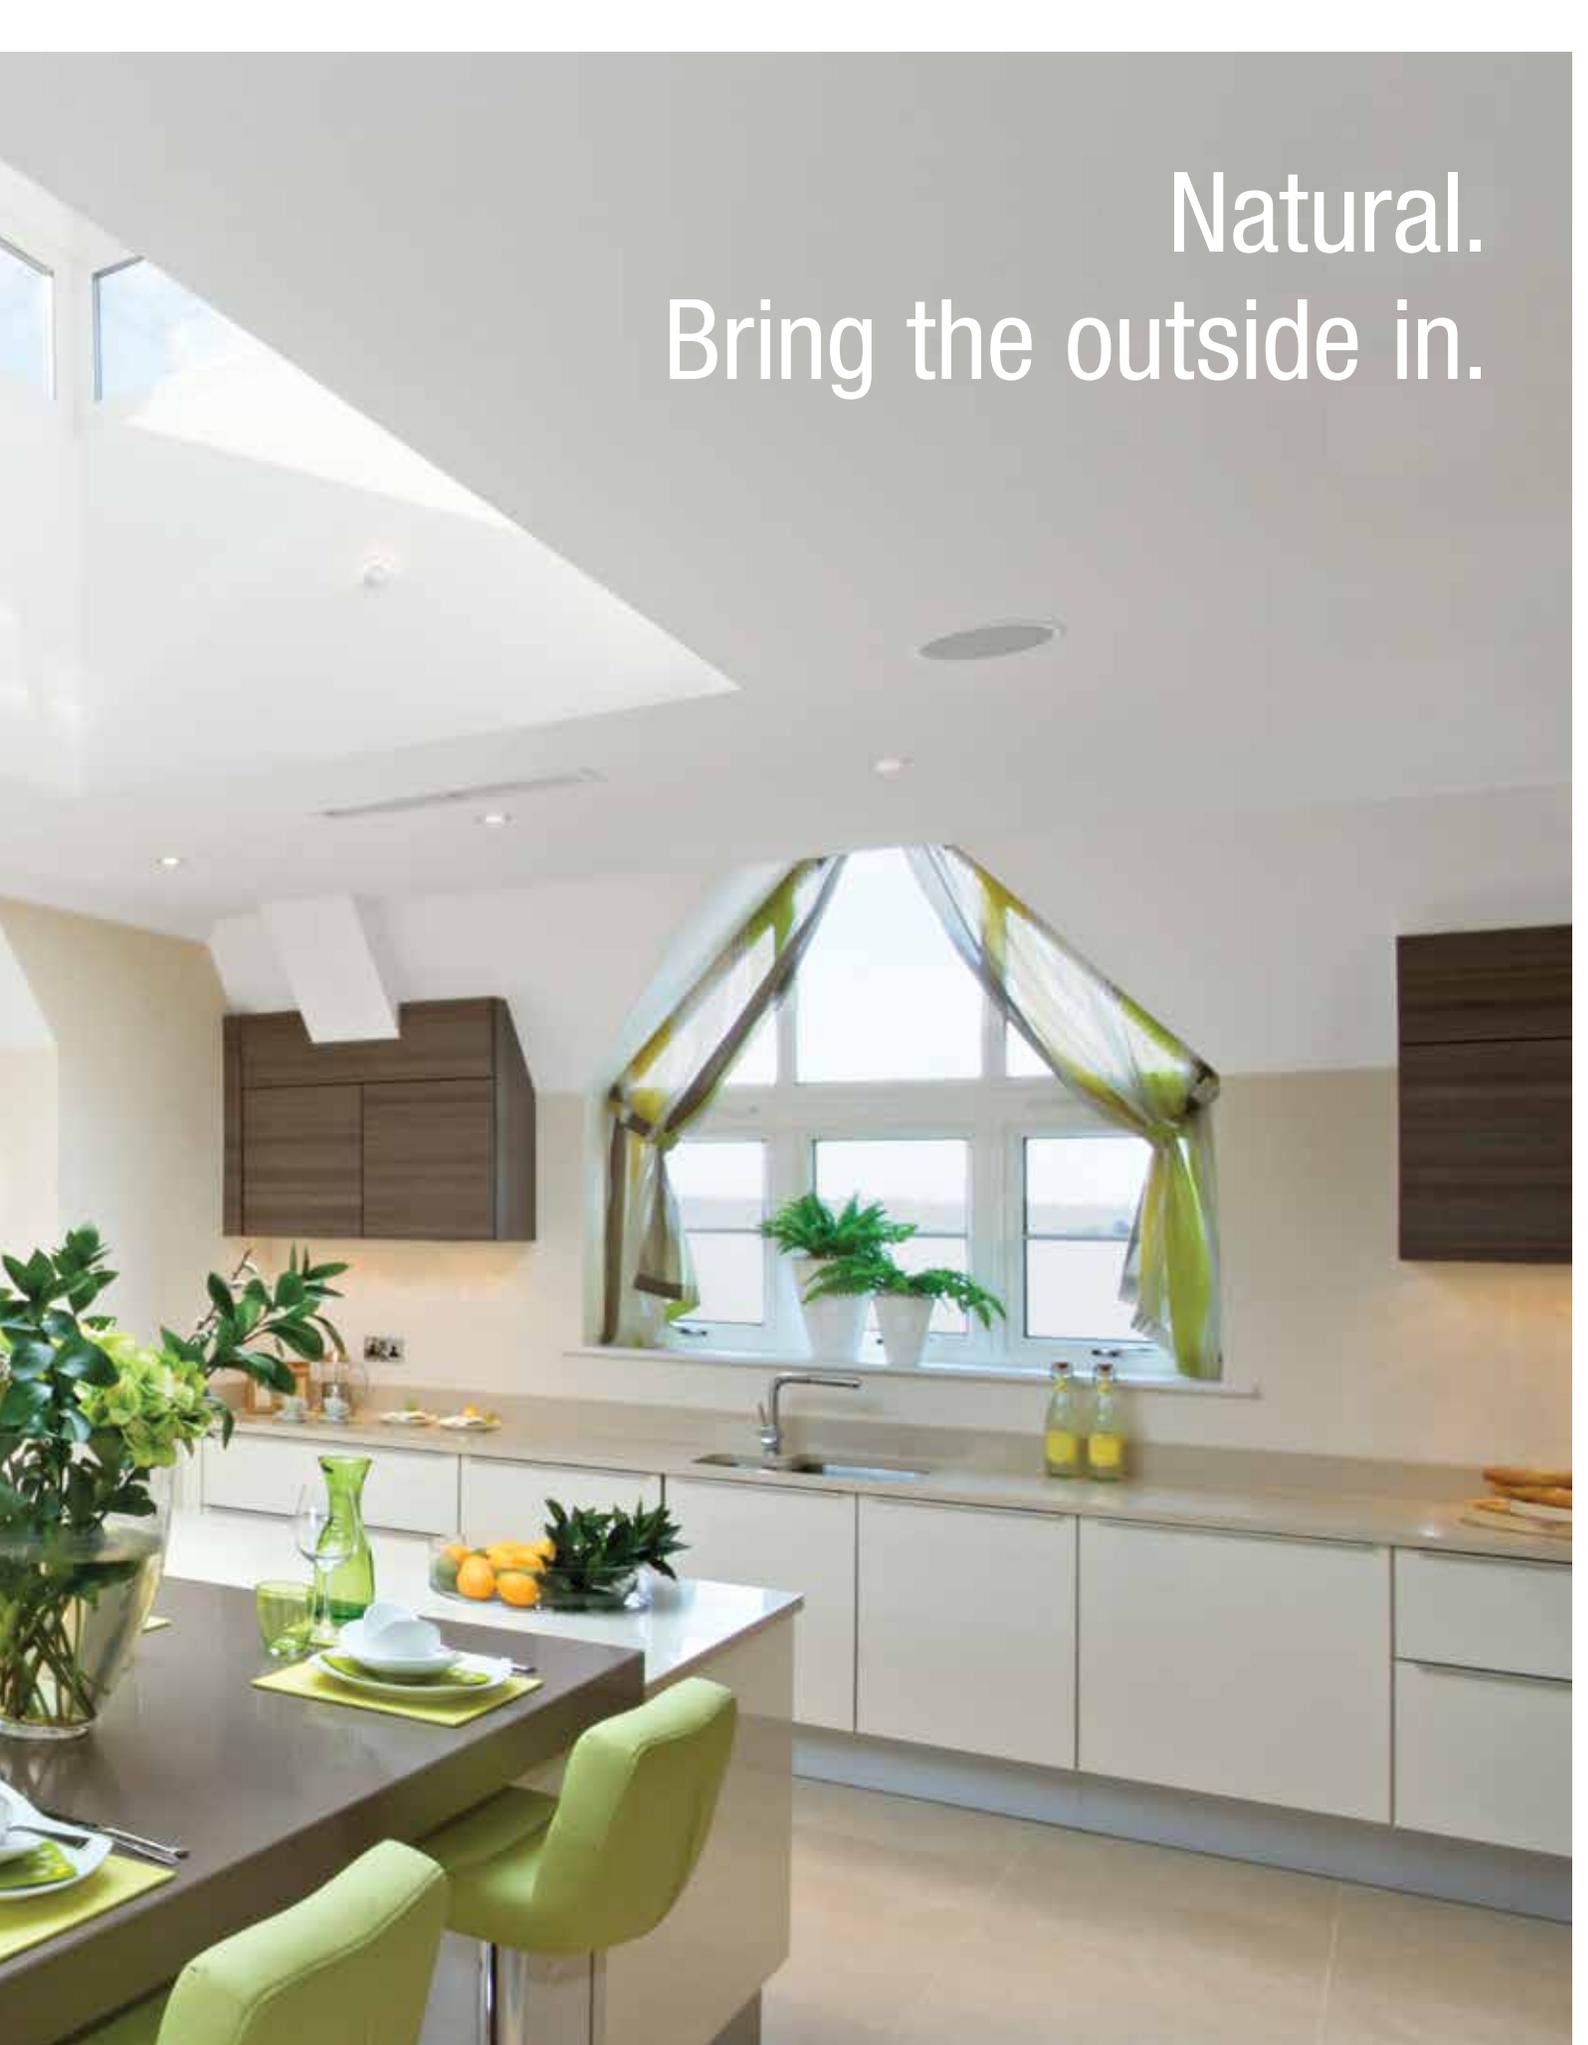




## RAUVISIO TERRA

### Soft, Textured HPL Surface

RAUVISIO terra™ is an extremely durable, deeply textured wood grain surface made from HPL rather than melamine paper. Our doors are double-sided, and feature matching deeply textured REHAU LaserEdge. The RAUVISIO terra laminates are typically laminated onto MDF or particleboard both top and bottom laminate sheets are identical and perfectly balanced.



Soft touch



Deeply embossed



Anti-fingerprint



Impact-resistant



Zero-joint  
technology



Surfaces and  
edgeband  
perfectly matched



Heat and humidity  
resistant



Warp resistant



*Whiskey Oak*

4511



*Mountain Oak*

4512



*Vineyard Oak*

4526



*Mission Maple*

4520



*Lakefront Elm*

4539




*East Elm*


4548



### Slab profile

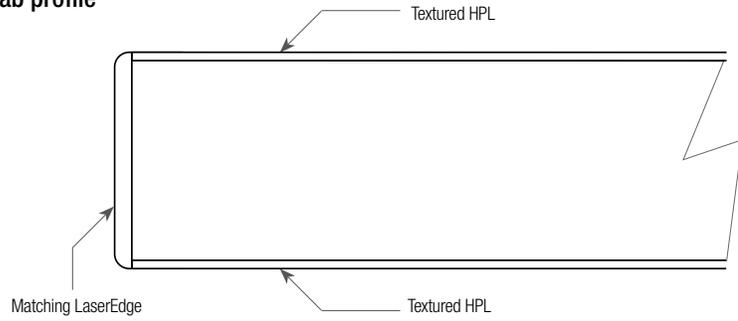

### Shaker profile

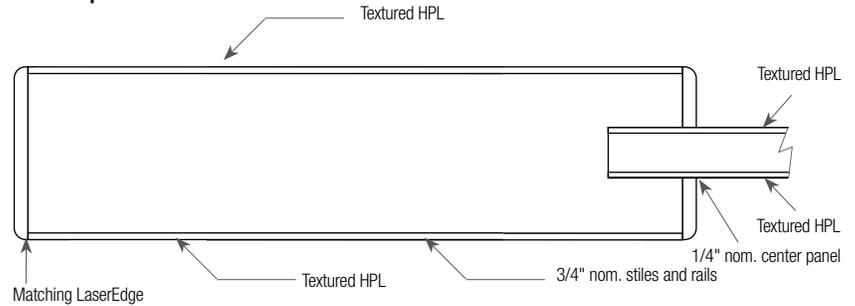

#### Profile Specifications

Appearance	Natural wood
Door style	Slab or shaker
Design style	Modern, contemporary
Construction	PUR laminated face and back, REHAU LaserEdge
Shaker stiles and rails	2-1/2 in., 2-3/4 in. and 3 in.
Face material	Deep embossed HPL - five colors
Back material	Deep embossed HPL - matching color
Edgeband	REHAU LaserEdge - matching color
Core	Super-refined MDF or particalboard
Grain direction	Choose vertical or horizontal (not cabinet matched)
Board thickness	13/16 in (21 mm)

#### Size Parameters

Minimum	3 x 5 in (76.2 x 127 mm)
Maximum	50 x 119 in (1270 x 3022.6 mm)
Minimum shaker size	6 x 12 in (152.4 x 304.8 mm) using 2.5 in. rails

#### Edgebanding Profile

Top edge	1.5 mm radius
Bottom edge	1.5 mm radius
Edgeband finish	Textured- color matched

#### Refacing Options

PSA sheet	53 x 130 x .031 in (1350 x 3050 x 10 mm) HPL sheet with pre-applied adhesive
-----------	--



### **Board Specifications**

RAUVISIO terra is flat laminated to a high-quality engineered MDF or particle board core. An engineered core provides a stable, consistent substrate, virtually eliminating warping.

### **Edgeband Specifications**

All components are edgebanded with REHAU LaserEdge, which provides a seamless joint that is extremely heat and moisture resistant. The result is a seamless board looks like a solid piece of wood.

### **Cleaning and Care**

Clean with a damp microfiber cloth and with a mild soap if needed. While the matte textured surface is scratch resistant, it should never be dry-wiped. However, solvent-based cleaners and harsh chemicals should be avoided. Do not use brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

### **Protective Coat**

There is no protective peel coat on RAUVISIO terra products




## RAUVISIO LEATHER

### Genuine, Reconstituted Leather Surface

RAUVISIO leather is a unique, recycled leather surface with a polyurethane coating. Its classic, warm appearance creates an elegant surface for high-quality furniture and interior design spaces. As a technically innovative material that even keeps the real leather aroma, RAUVISIO leather is ideal for today's modern, curated lifestyle.



Soft touch



Deeply embossed



Anti-fingerprint



Leather-scent



Zero-joint technology



Surfaces and edgeband perfectly matched



Heat and humidity resistant




Warp resistant




*Beige*



*Caramel*



*Black*

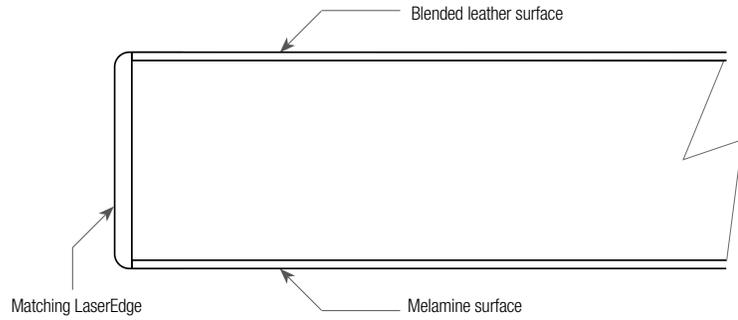

### Profile Specifications

Appearance	Leather
Door style	Slab
Design style	Modern, contemporary
Construction	UV-coated bonded leather, REHAU LaserEdge
Face material	Textured bonded leather – multiple colors
Back material	Melamine - matching color
Edgeband	REHAU laser edge - matching color
Core	Particleboard
Grain direction	Choose vertical or horizontal (not cabinet matched)

### Size Parameters

Minimum	3 x 5 in (76.2 x 127 mm)
Maximum	50 x 119 in (1270 x 3022.6 mm)

### Edgebanding Profile

Top edge	1.5 mm radius
Bottom edge	1.5 mm radius
Edgeband material - standard	Textured - color matched
Edgeband material - optional	Aluminum



### **Board Specifications**

RAUVISIO leather uses real, bonded leather with a polyurethane coating applied to a melamine board. A melamine board is an engineered core that provides a stable, consistent substrate, virtually eliminating warping.

### **Edgeband Specifications**


All components are edgebanded with REHAU LaserEdge, which provides a seamless joint that is extremely heat and moisture resistant. The result is a seamless board that rivals a solid surface.

### **Cleaning and Care**

Clean with a damp microfiber cloth and with a mild soap if needed. Avoid abrasive cleaners, solvent based cleaners and harsh chemicals. Do not use paper towels, brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

### **Protective Coat**

There is no protective peal coat on RAUVISIO leather products.

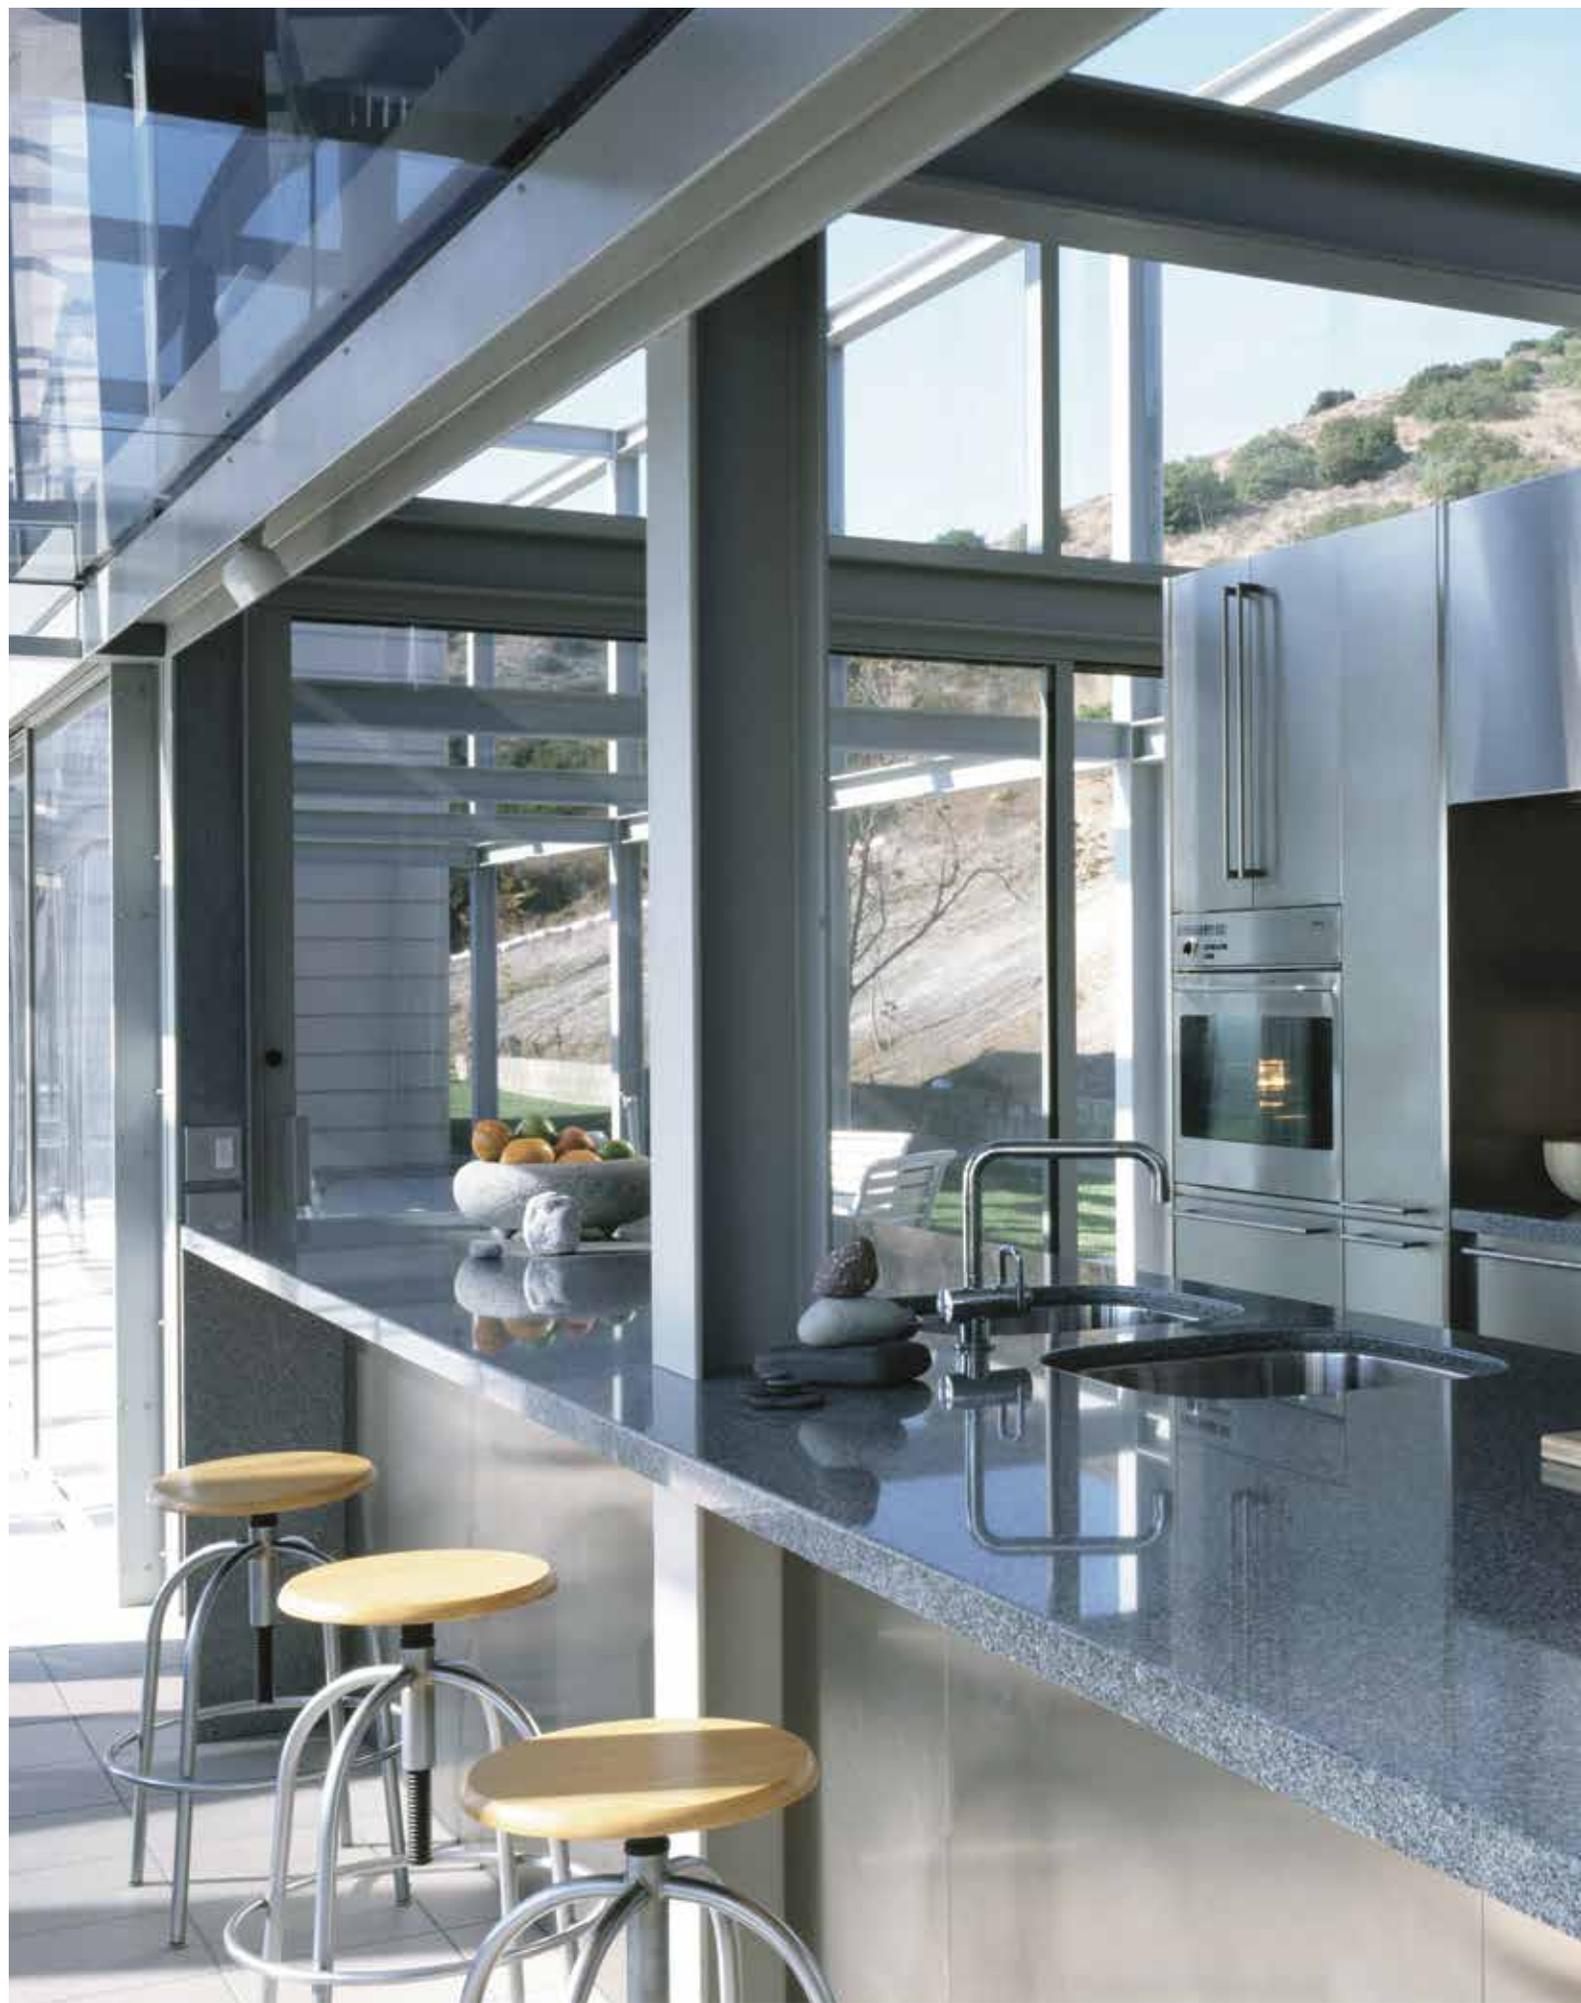

Metal.  
Clean modern look.





## RAUVISIO METAL

### Cool, Authentic Metal Surface

Create a cool, noticeably modern design with RAUVISIO metal and offer a true metal surface in both natural aluminum and brushed stainless steel finishes. The cabinet doors feature matching metal surfaces on all surfaces, giving it the appearance of a solid metal door. The metal surfaces are bonded to a particle board core using PUR glue.



Cool touch technology



Anti-fingerprint



Impact-resistant



Warp resistant



Surfaces and edgeband perfectly matched




Heat and humidity resistant



*Brushed Stainless Steel*



*Natural Aluminum*

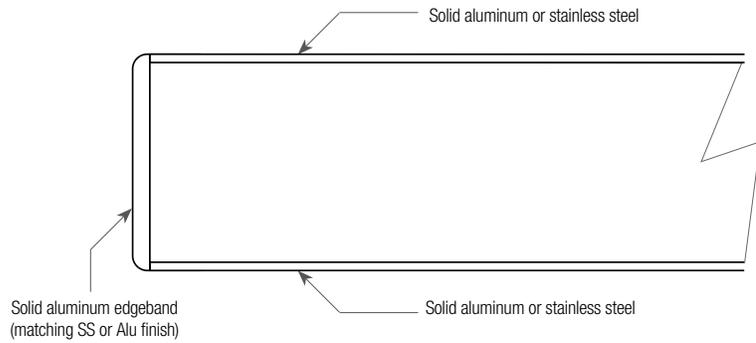

### Profile Specifications

Appearance	Metal
Door style	Slab
Design style	Modern, contemporary
Construction	PUR laminated face and back, PUR edgebanded
Face material	1.0 mm anodized aluminum materials (aluminum or stainless steel finish)
Back material	1.0 mm anodized aluminum materials (aluminum or stainless steel finish)
Edgeband	Matching anodized aluminum (aluminum or stainless steel)
Core	Particle board
Grain direction	Vertical

### Size Parameters

Minimum	3 x 5 in (76.2 x 127 mm)
Maximum	50 x 110 in (1270 x 2794 mm)

### Edgebanding Profile

Top edge	Bevel
Bottom edge	Bevel
Edgeband material	1.0 mm aluminum



### **Board Specifications**

RAUVISIO metal uses solid 1.0 thick metal laminates on the front and back of a PUR laminated particle board core. A particle board core is an engineered core that provides a stable, consistent substrate, virtually eliminating warping.

### **Edgeband Specifications**

All components are edgebanded with our solid 1.0 mm thick metal edgebanding, which provides a permanent joint that is extremely water resistant. The result is a seamless board that rivals the look of a solid metal door without the weight.

### **Grain Direction**

The grain direction can be specified in either horizontal or vertical direction, and for each component.

### **Cleaning and Care**

Clean with a damp microfiber cloth and with a mild soap if needed. Avoid abrasive cleaners, solvent based cleaners, or harsh chemicals. Do not use brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

### **Protective Coat**

There is no protective peal coat on RAUVISIO metal products.



## TAMBOUR DOORS

### Metallic Line

REHAU Tambour Doors give full access to cabinets, operate smoothly and quietly and require minimal space with no doors that open out into the living area. REHAU Tambour Doors come as custom cut-to-size kits built to your specifications, ready to install with no extra cutting or fabrication. Our doors are scratch resistant and do not stick or swell with humidity. The metallic line combines the high-quality of look of solid aluminum or stainless steel with the functionality of a polymer roller shutter cabinet door.



Cool touch technology



Space-saving



Environmentally friendly PP



Online configuring



Easy installation





Customizable counterbalance



*Brushed Stainless Steel*



*Natural Aluminum*



#### Profile Specifications

Appearance	Stainless steel or aluminum
Door style	Face-mounted tambour door
Design style	Modern, contemporary
Construction	Anodized aluminum materials (aluminum or stainless steel finish)
Tambour slat width	20 mm or 25 mm
Handle type	Recessed grip rail
Installation	Custom cut-to-size, ready-to-assemble kits

#### Size Parameters

Minimum inside height	18 in (457.2 mm)
Maximum inside height	80 in (2032 mm)
Minimum inside width	18 in (457.2 mm)
Maximum inside width	47.75 in (1212.85 mm)
Minimum inside depth	12 in (304.8 mm)

#### Edgebanding Profile

Cabinet style	Frameless cabinet
Cabinet walls	3-sided (on countertop) or 4-sided
Cabinet wall thickness	3/4 in (19.05 mm)



### **Tambour Door Specifications**

REHAU Tambour Doors are custom, cut-to-size to your specifications and come in both aluminum or stainless steel finishes. The tambour slats are a combination of metal and polymer construction that feature a soft hinge design for quiet and smooth operation. The frame and other aesthetic components are solid metal. Tambour door kits come with counterbalance system to balance the weight of the door and keep it from slamming shut. Door kits come complete and ready to install with detailed instructions.

### **Cabinet Specifications**

Your cabinet must be a frameless cabinet and can be either 4 sided or 3 sided (on a countertop). The walls should be 3/4 in. thick, which provides a 1/8 in. reveal around the tambour door. The door will add 3/4 in. thickness to the face of the cabinet, just like a standard cabinet door. All dimensions related to the tambour must be given as inside cabinet dimensions (H x W x D).

### **Cleaning and Care**

Clean with a damp microfiber cloth and with a mild soap if needed. Avoid abrasive cleaners, solvent based cleaners, or harsh chemicals. Do not use brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

### **Protective Coat**

A protective peel coat is applied to the metal surfaces of the tambour components. Do not expose peel coat to direct sunlight before removal. Remove promptly after cabinet door installation. To remove peel coat, use rubber fingertips, or our peel coat removal tool.

Getting Started



## REHAU CABINET DOORS

Modern Design. No hassles.

With REHAU Cabinet Doors, our entire range of RAUVISIO and FENIX NTM surfaces is now available in custom, fully-finished doors.

Manufacturers are no longer limited by the need for costly laser edgebanding machines because we take care of the whole process for you -- cutting the board and finishing the door with perfectly matched adhesive-free REHAU LaserEdge™.

You receive a perfectly sized, finished cabinet door that is ready to attach and flexible enough to be altered on-site with drill-holes and cut-outs for handles and outlets.



### Login

**Username:**

**Password:**

Keep me logged in until I log out or close the browser [Forgot your password?](#)

Order custom cabinet doors online through REHAU's online order portal. To create a new account, go to [www.na.rehau.com/cabinetdoors](http://www.na.rehau.com/cabinetdoors).

Once you sign up, our customer service team will complete your profile and apply your personal discount. If you place an order before this has been done, your order will be placed on hold until your profile is completed. You may be required to purchase through a distributor. In this case, you can place the order online, and your distributor will contact you to complete your purchase.

---

## Ordering Information

### Order Details

- Orders placed in inches
- Order exact size down to nearest 1/16 in (1.5 mm)
- Order will be in width x height measurements
- All pricing is per square foot, FOB our fabrication center
- Shipping charges are added at time of order (when using Order Portal)

### Grain Direction

For products where grain direction is applicable (RAUVISIO radiant, RAUVISIO terra and RAUVISIO metal), the grain direction can be selected in either horizontal or vertical direction.

### Lead Times

Lead times may vary per product. Typical orders ship within 5 business days, but up to 15 business days. The order portal will inform you if the lead time will be longer than 5 business days. The day after you receive your acknowledgement is business day one provided a PO has been sent. Please contact Customer Service at (888) 734-2810 for the most up to date lead times.

### Order Confirmation

All orders are confirmed within 24 hours via email. Contact Customer Service at (888) 734-2810 if you do not receive an order confirmation.

All orders enter production the day following the order confirmation to allow for changes. Orders will be placed on hold until PO is received. Any order discrepancy must be reported to Customer Service within 24 hours of receipt. REHAU is not liable for unreported order errors or discrepancies.

### Order Changes and Cancellations

Changes or cancellations must be received in writing within 24 hours. Any changes made after the 24 hour cut off may result in a 50-100% change fee unless the order is not yet in production.

### Shipping and Delivery

Orders will ship LTL or UPS based on the component size and order size. Customers have a choice between REHAU carrier and customer carrier. If REHAU carrier is chosen, the shipping costs will be added based upon size and weight at the time of order. If customer carrier is chosen, there will not be any shipping charges applied, however there will be a packaging fee (\$25-\$150) applied after the order is placed.

### Samples and Showroom Products

A variety of sample options for showrooms and promotional displays are available. Contact your Account Manager for complete details and options.

Contact Customer Service at (888) 734-2810 to find more information on our standard range of samples.

Our samples come in the following standard sizes: 3.5 x 6 in., 5 x 10 in., and 12 x 15 in. at a discounted rate compared to custom samples.

### Receiving Your Order

We strive to ship your orders accurately, completely and on time. Please inspect the contents of your shipment before signing your delivery receipt. If you are unable to inspect the contents upon receipt, and there is no visible damage to the packaging or skid, please note "Subject to Inspection for Internal Damage" on the bill of lading.

### **Damage, Defects or Missing Product**

Any damage or missing items due to damaged packaging must be documented on the bill of lading at time of delivery, otherwise REHAU will not be held responsible. Photograph any exterior packaging damage before inspecting contents.

All damage and defects, concealed or not, and missing product must be reported within 48 hours of receipt to Customer Service at (888) 734-2810. When calling please have the following information available: Order or Article No., Tracking or BOL No and Date Received.

### **Remake Orders**

When damages, defects, or errors are found with your order, contact Customer Service at (888) 734-2810 within 48 hours of delivery. If the remake is due to customer error, then product, packaging and shipping charges will be billed, standard lead times will apply. If the remake is caused by REHAU error, then no charges will apply, and we will expedite the remake order.

We may request the return of defective or damaged product for inspection and will issue a pre-paid call tag. In most cases, digital photos will suffice.

---

## **Service and Care**

### **Warranty**

Components manufactured by REHAU are warranted against defects occurring in the material or manufacturing process under normal use for 5 years from the date of original purchase. Complete warranty information can be found on our website at [www.na.rehau.com/warranties](http://www.na.rehau.com/warranties)

Warranty covers repair or replacement of product only. REHAU's liability will not exceed the invoiced amount of the covered product. Products manufactured outside our normal specifications are not covered by our warranty.

Our manufacturing tolerance is +/- 1/32 in. or 1 mm. Warp specification is 1.2 mm per linear foot. We recommend storing all components in a temperature controlled environment upon delivery.

### **Heat and Moisture Resistance**

Our products are engineered to meet strict European AMK kitchen tests for heat, humidity and water vapor intrusion. We've tested to 158°F (70°C), which exceeds KCMA standards requiring 24 hours at 120°F and 70% humidity without showing discoloration, blistering or other material failure.

We are not responsible for material damage due to excessive heat and moisture beyond these specifications.

### **Cleaning and Care**

Remove protective film immediately following installation. We recommend using rubber fingertips or our peel coat removal tool. We do not recommend using a razor blade or any sharp objects to remove the peel coat.

Once protective film has been removed, components can be cleaned with mild soap and water and a damp cotton cloth. Do not use brushes, scouring pads or any abrasive materials on surfaces. Avoid any solvent-based cleaners or harsh chemicals.

## Custom Cut-to-Size Options

### Doors and Drawer Fronts

Components are 3/4 in. thick and are edgebanded on all four sides.

### End Panels

We offer door and drawer panel matching base, tall, and wall applied end panels edgebanded on all four sides. End panels are rectangle, and are designed to capture the toe kick.

### Filler Panels

Filler panels come as 3/4 in. thick components with your choice of either the two short sides or two long sides edgebanded. Note that the minimum width must be at least 3 inches for the long sides to be edgebanded, and the minimum width must be at least 3 inches for the short sides to be edgebanded. It is therefore recommended to order filler panels in 3 in. widths and then rip them down to size during installation.

### Backsplash

We offer backsplash options using RAUVISIO crystal slim. RAUVISIO crystal slim is made from laminating a 2.0 mm RAUVISIO crystal glass laminate to a 2.0 mm color matched balance sheet, and comes as a 4 mm thick panel. RAUVISIO crystal slim can be applied directly to drywall or over existing tile backsplash using standard polyurethane or silicone adhesive.

### Raw Boards and Edgeband

We have laminated boards in 3/4 in. thickness (raw edge) available, along with matching edgeband coils for all of our products. Please contact our Customer Service at (888) 734-2810 for more information.

Surface	Board Size	Cut-to-size edged doors	Boards	1/4 in. boards	Sheets	PSA Sheets
RAUVISIO brilliant	51 x 110 x 3/4 in (1300 x 2800 x 19 mm)	•	•	•	•	•
RAUVISIO radiant	49 x 110 x 3/4 in (1220 x 2800 x 19 mm)	•	•			
RAUVISIO crystal and RAUVISIO crystal matte	51 x 110 x 3/4 in (1300 x 2800 x 19 mm)	•	•		•	
RAUVISIO crystal slim	51 x 110 x 1/8 in (1300 x 2800 x 4 mm)	•			•	
FENIX NTM	53 x 120 x 13/16 in (1350 x 3050 x 21 mm)	•	•		•	•
RAUVISIO sky and RAUVISIO urban	49 x 110 x 3/4 in (1220 x 2800 x 19 mm)	•	•			
RAUVISIO terra	53 x 120 x 13/16 in (1350 x 3050 x 21 mm)	•	•	•	•	•
RAUVISIO leather	49 x 110 x 3/4 in (1220 x 2800 x 19 mm)	•	•			
RAUVISIO metal	Not applicable	•				
Tambour Doors	Not applicable	•			•	

## Customer Service Contacts

Hours | Monday-Friday, 8am to 7pm EST

Email | [orders@rehau.com](mailto:orders@rehau.com)

United States Phone (888) 734 2810 Fax (616)-285-7622

Canada Phone (888) 905-0345 Fax (514) 905-0490



For updates to this publication, visit [na.rehau.com/resourcecenter](http://na.rehau.com/resourcecenter)

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith. © 2017 REHAU

Printed In Canada 100.760 en 01.2017